

REC'D 18 APR 2005

WIPO

PCT

IB/65/50851



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

04101173.5 ✓

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk





Anmeldung Nr:  
Application no.: 04101173.5  
Demande no:

Anmeldetag:  
Date of filing: 22.03.04  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS  
BJB GmbH & Co. KG  
Werler Strasse 1  
59755 Arnsberg  
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Assembly of a capped high-pressure discharge lamp and a lamp holder

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H01K9/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PL PT RO SE SI SK TR LI



# Assembly of a capped high-pressure discharge lamp and a lamp holder

The invention relates to an assembly of a capped high-pressure discharge lamp and a lamp holder.

The invention also relates to a capped high-pressure discharge lamp for use in such an assembly.

5 The invention further relates to a lamp holder for use in such an assembly.

High-pressure discharge lamps can have a high color temperature, a high color rendering index and a high brightness, these lamps are highly suitable for applications requiring a compact light source in order to form a beam in conjunction with a reflector, for example, for road illumination, for studio or projection purposes, for professional indoor  
10 lighting, for instance in shops and in industry, and for city beautification.

High-pressure discharge lamps of the kind mentioned in the opening paragraph either have a discharge vessel with a ceramic wall or have a quartz glass discharge vessel. Such high-pressure discharge lamps are widely used in practice and combine a high luminous efficacy with favorable color properties. The discharge vessel of the lamp contains  
15 one or several metals or metal halides in addition to Hg and a rare gas filling.

A ceramic wall in the present description and claims is understood to be a wall made from one of the following materials: mono-crystalline metal oxide (for example sapphire), densely sintered polycrystalline metal oxide (for example aluminum oxide, YAG), and densely sintered polycrystalline metal nitride (for example aluminum nitride).  
20

A capped high-pressure discharge lamp and lamp holder for use with such a discharge lamp are known from European patent application EP-A 0 478 078. The capped high-pressure discharge lamp has a lamp cap of insulating material provided with a centrally  
25 disposed contact member and with a metal sleeve concentrically thereto. A first end of the discharge vessel is mounted within the metal sleeve and a current supply conductor is attached to the metal sleeve. The rotationally symmetrical geometry of the cap allows insertion of the high-pressure discharge lamp into the lamp holder in a rotational position.

A disadvantage of the known assembly of a capped high-pressure discharge lamp and a lamp holder is that the position of the capped high-pressure discharge lamp in the lamp holder is relatively inaccurate. This implies that the center of the light discharge is not known with sufficient accuracy.

5

The invention has for its object to eliminate the above disadvantage wholly or partly. According to the invention, an assembly of a capped high-pressure discharge lamp and a lamp holder,

10 the capped high-pressure discharge lamp comprising:

- an outer envelope in which a discharge vessel is arranged around a longitudinal axis,
- the discharge vessel enclosing, in a gastight manner, a discharge space provided with an ionizable filling,

15 - the discharge vessel having a first and a second mutually opposed connection portion through which a first and a second current-supply conductor, respectively, extend to a pair of electrodes arranged in the discharge space,

- the outer envelope having a pinched portion supporting the discharge vessel via the first and second current-supply conductors,

20 - the pinched portion being provided with a clamping member surrounding the pinched portion with clamping fit,

- a lamp cap having a base portion of an insulating material and a substantial circular-cylindrical cup-shaped portion for receiving the clamping member,

- the cup-shaped portion being provided with a protruding collar,

25 - the base portion being provided with a first and a second contact member projecting beyond the cup-shaped portion, the first and second current-supply conductors being electrically connected to the first and second contact members, respectively, the lamp holder comprising:

- a base portion and a substantial circular-cylindrical flange for receiving the cup-shaped portion of the capped high-pressure discharge lamp,

30 - the base portion being provided with first and second connection means, wherein

- the flange of the lamp holder receives the cup-shaped portion of the capped high-pressure discharge lamp such that the flange engages the protruding collar of the cup-

shaped portion and the first and second contact members make electrical contact with the first and second connection means, respectively,

- an inner diameter of the flange having a tolerance less than or equal to -0.2 mm,
- 5 - an outer diameter of the cup-shaped portion having a tolerance less than or equal to +0.2 mm,
- the respective tolerances extending over a length of at least 2.5 mm measured with respect to the protruding collar along the longitudinal axis.

Specifying relatively narrow tolerances for the respective diameters of the flange of the lamp holder and the cup-shaped portion enables the accurate positioning of the cup-shaped portion into flange. In this manner, the discharge vessel of the capped high-pressure discharge lamp is positioned with relatively high accuracy in the lamp holder. The center of light of the discharge is located on the longitudinal axis with relatively high accuracy. In addition, the position of the center of the light discharge on the longitudinal axis, i.e. the distance of center of the light discharge with respect to a reference (point) on the lamp holder, can be determined with relatively high accuracy. This distance is also referred to as the "light-center length" of the discharge. A relatively well-defined light-center length of the light emitted by the discharge in the discharge vessel of the capped high-pressure discharge lamp is obtained with the assembly according to the invention. Such accurate positioning of the high-pressure discharge lamp with respect to the lamp holder is helpful when the assembly of the high-pressure discharge lamp and the lamp holder is mounted in a reflector. This is in particular the case when the beam (pattern) emitted by the reflector has to be well defined such as, by way of example on roads where vehicles are traveling and glare towards the drivers has to be avoided. In addition, there is a tendency in the market to diminish the size of the lamps and the lamp holders. This tendency amplifies the need for accurate positioning of (discharge) lamps in their respective lamp holders.

Upon receiving the cup-shaped portion of the capped high-pressure discharge lamp, the flange of the lamp holder engages the protruding collar of the cup-shaped portion. This engaging relationship between the cup-shaped portion and the flange determines the height of the discharge lamp with respect to the lamp holder. In this manner the light-center length along the longitudinal axis is accurately determined. The position of the center of the light discharge in a plane perpendicular to the longitudinal axis is determined by the tolerances of the respective diameters of the flange of the lamp holder and the cup-shaped

portion. The higher the requirement for the tolerance of the respective diameters, the better the center of the light discharge is positioned on the longitudinal axis.

In the known assembly, a lamp cap of an insulating material is fastened to a first connection portion of the lamp vessel and provided with a first, central contact member.

5 The lamp cap has a substantially rotationally symmetrical metal sleeve around the first connection portion of the lamp vessel, which sleeve is substantially concentric with the first contact member within which sleeve the first connection portion is fixed. The metal sleeve has a continuous circular relief in the form of a circumferential groove with which retention means of the lamp holder can engage, or a clamping terminal of the lamp holder for making  
10 electrical contact. In the known assembly the position of the capped high-pressure discharge lamp in the lamp holder is relatively inaccurate. The capped high-pressure discharge lamp can easily move in the known lamp holder giving relatively large inaccuracies in the position of the center of the discharge with respect to the longitudinal axis and with respect to the lamp holder.

15 In the assembly according to the invention the base portion is the reference plane for the fit system. The accuracy is obtained by the relatively small tolerances on the height of the lamp holder and the relatively small tolerances on the flange on the one hand, and on the other hand is obtained by the small tolerances on the outer diameter of the cup-shaped portion and the protruding collar which both are used as the reference during the  
20 adjustment of the burner in the manufacturing process.

Preferably, the inner diameter of the flange has a tolerance less than or equal to -0.10 mm and the outer diameter of the cup-shaped portion has a tolerance less than or equal to +0.05 mm, the respective tolerances extending over a length of at least 5 mm measured with respect to the protruding collar along the longitudinal axis. Specifying  
25 relatively narrow tolerances for the respective diameters of the flange of the lamp holder and the cup-shaped portion enables the positioning of the cup-shaped portion into flange with relatively high accuracy. In this manner, the discharge vessel of the capped high-pressure discharge lamp is positioned with relatively high accuracy in the lamp holder. A very accurate light-center length of the light emitted by the discharge in the discharge vessel of the  
30 capped high-pressure discharge lamp is obtained with the assembly according to the preferred embodiment of the invention. The higher the requirement imposed for the tolerances of the respective diameters, the better the center of the light discharge is positioned on the longitudinal axis.



In order to further improve the accuracy of the position of cup-shaped portion of the capped high-pressure discharge lamp in the flange of the lamp holder, the mounting of the clamping member in the lamp cap can be improved. To this end a preferred embodiment of the assembly according to the invention is characterized in that the clamping member is provided with a substantially circular-cylindrical engagement portion for fixing the clamping member in the cup-shaped portion. This engagement portion enhances the fit of the clamping member in the cup-shaped portion. In addition, the engagement portion can be used to provide a rigid connection, for instance by spot welding, between the clamping member and the cup-shaped portion.

A preferred embodiment of the assembly according to the invention is characterized in that the cup-shaped portion of the lamp cap and the flange of the lamp holder are made from a metal. The use of metal provides that the relatively narrow tolerances of the diameters of the inner diameter of the flange and the outer diameter of the cup-shaped portion can be realized. In addition, because of the relatively high temperatures of the discharge lamp the use of metal is preferred.

In order to be able to provide the engaging relationship between the cup-shaped portion and the flange of the lamp holder and in addition to be able to provide electrical contact between the first and second contact members and the first and second connection means in the base portion of the lamp holder, the base portion is constructed in a special fashion. To this end a preferred embodiment of the assembly according to the invention is characterized in that a cylindrical body of an insulating material is arranged with clearance in the base portion of the lamp holder and a resilient means is provided between the cylindrical body and the flange of the lamp holder, the cylindrical body lying under resilient pressure against the flange when the flange receives the cup-shaped portion. The cylindrical body is relatively free to move in the base portion of the lamp holder as long as the flange of the lamp holder is separate from the cup-shaped portion. When the flange receives the cup-shaped portion, the position of the cylindrical body becomes relatively fixed. Upon inserting the cup-shaped portion into the flange of the lamp holder, the cylindrical body is pulled in the direction of the discharge lamp, thereby putting pressure on the resilient means between the cylindrical body and the flange of the lamp holder. In this manner the height of the discharge lamp with respect to the lamp holder is only determined by the engaging relationship between the cup-shaped portion and the flange of the lamp holder. In this manner the light-center length along the longitudinal axis is accurately determined.

From a constructional point of view the cylindrical body is preferably built from two adjacent parts. One part provides that the cylindrical body is pulled in the direction of the discharge lamp when the cup-shaped portion is inserted into the flange of the lamp holder, whereas the other part comprises the electrical connection means. To this end a preferred embodiment of the assembly according to the invention is characterized in that the cylindrical body comprises a first cylindrical portion and an adjacent second cylindrical portion at a side of the first cylindrical portion facing away from the capped high-pressure discharge lamp, the first cylindrical portion being provided with a first and a second arc-shaped slot, which slots at one end are provided with a circular widening for passing through the first and second contact members when the flange of the lamp holder receives the cup-shaped portion of the capped high-pressure discharge lamp, the first and second contact members of the base portion making electrical contact with the first and second connection means after rotation of the first and second contact members in the arc-shaped slots, the first and second connection means being provided in the second cylindrical portion. The arc-shaped slots provided with a circular widening at one end provide the insertion of the contact members according to a so-called twist and lock mechanism. The first and second contact members are inserted in the circular widening of the first and a second arc-shaped slot when the flange of the lamp holder receives the cup-shaped portion of the capped high-pressure discharge lamp. As a next step the cup-shaped portion is twisted until the first and second contact members of the base portion make (mechanical and) electrical contact with the first and second connection means in the second cylindrical portion of the cylindrical body. The rotation of the first and second contact members in the arc-shaped slot provides the moving of the first cylindrical portion of the cylindrical body in the direction of the discharge lamp. Due to this movement pressure is put on the resilient means between the first cylindrical portion and the flange of the lamp holder. In this manner the height of the discharge lamp with respect to the lamp holder is only determined by the engaging relationship between the cup-shaped portion and the flange of the lamp holder. In this manner the light-center length along the longitudinal axis is accurately determined.

A preferred embodiment of the assembly according to the invention is characterized in that the first and second cylindrical portion are made from a ceramic material. The use of ceramic materials, such as aluminum oxide, is suitable because of the relatively high temperatures of the discharge lamp.

In another preferred embodiment of the assembly according to the invention the cylindrical body is provided with hampering means hampering the rotation around the

longitudinal axis of the first and second cylindrical portions with respect to each other. To this end the first and second cylindrical portions are provided with suitable protruding and intruding parts. In this manner, the orientation of the first and second cylindrical portions with respect to each other around the longitudinal axis is limited. Preferably, the first and second cylindrical portions are attached to each other by retention springs or by rivets. The retention springs allows some movement, in particular along the longitudinal axis, of the first and second cylindrical portions of the cylindrical body in the base portion of the lamp holder with respect to each other. Preferably, the first and second cylindrical portions are fixed to each other hampering the movement of the first and second cylindrical portions with respect to each other.

Another preferred embodiment of the assembly according to the invention is characterized in that the first and second contact members are provided with a shank, the shank being provided with a disc at a side of the shank facing away from the cup-shaped portion, the disc having a dimension allowing passage through the circular widening of the slots, the shanks having a smaller dimension allowing passage through the first and second arc-shaped slots. The shanks and discs of the first and second contact members cooperate with the arc-shaped slots provided with a circular widening at one end according to the twist and lock mechanism.

Another favorable embodiment of the assembly according to the invention is characterized in that the base portion of the lamp cap is provided with a protruding portion cooperating with a complementary intruding portion in the first cylindrical portion of the cylindrical body. The cooperation between the protruding portion in the base portion of the lamp cap and the intruding portion in the first cylindrical portion of the cylindrical body are convenient to ensure, for instance, that the discharge lamp is always inserted in a certain orientation in the lamp holder. In principle there are two possible orientations of the discharge lamp with respect to the lamp holder. In one orientation the first electrode in the discharge vessel is connected to the first connection means in the lamp holder (via the first current-supply conductor and the first contact means) and in the other orientation the first electrode in the discharge vessel is connected to the second connection means in the lamp holder (also via the first current-supply conductor and the first contact means). It can be desirable to ignite the discharge in the discharge vessel always starting at a certain electrode, for instance that electrode which is closest to the pinched portion of the outer envelope. In that case the orientation of the discharge vessel is determined when the flange of the lamp holder receives the cup-shaped portion of the capped high-pressure discharge lamp.

The invention also relates to a capped high-pressure discharge lamp for use in such an assembly.

The invention further relates to a lamp holder for use in such an assembly.

5

The invention will now be explained in more detail with reference to a number of embodiments and a drawing, in which:

Fig. 1 shows a perspective side view of an embodiment of the assembly of a capped high-pressure discharge lamp 1 and a lamp holder 50;

10

Fig. 2 shows an exploded perspective view of an embodiment of the assembly of a capped high-pressure discharge lamp 1 and a lamp holder 50;

Fig. 3 shows the first cylindrical portion of the base portion in cross-section perpendicular to the longitudinal axis, and

Fig. 4 shows a cross-section of lamp holder and the lamp cap comprising the cup-shaped portion and the base portion provided with the first and second contact members.

15

The Figures are purely diagrammatic and not drawn true to scale. Some dimensions are particularly strongly exaggerated for reasons of clarity. Equivalent components have been given the same reference numerals as much as possible in the Figures.

20

Figure 1 very diagrammatically shows a perspective side view of an embodiment of the assembly of a capped high-pressure discharge lamp 1 and a lamp holder 50. The capped high-pressure discharge lamp 1 comprises an outer envelope 10 in which a discharge vessel 11 is arranged around a longitudinal axis 22. The discharge vessel 11 encloses, in a gastight manner, a discharge space 13 provided with an ionizable filling comprising mercury, metal halides or metals and a rare gas. In the example of Figure 1, the discharge vessel 11 has a first 2 and a second 3 mutually opposed connection portion through which a first 4 and a second 5 current-supply conductor, respectively, extend to a pair of electrodes 6, 7 arranged in the discharge space 13. Preferably, the connection portions 2, 3 are so-called neck-shaped portions. In an alternative embodiment the discharge vessel is cylindrically shaped over its entire length. In the example of Figure 1, the outer envelope 10 has a pinched portion 20. The pinched portion 20 supports the discharge vessel 11 via the first and second current-supply conductors 4, 5. In the example of Figure 1, a first connection conductor 14 provided in the pinched portion 20 and is connected to the second current-

30

supply conductor 4. In addition, a second connection conductor 15 provided in the pinched portion 20 runs alongside the discharge vessel and is connected to the second current-supply conductor 5. The pinched portion 20 of the outer envelope 11 is provided with a clamping member 25 surrounding the pinched portion 20 with clamping fit. In addition, a lamp holder 50 is shown in Figure 1 having a substantial circular-cylindrical flange 55 for receiving the capped high-pressure discharge lamp 1. The lamp holder 50 is provided with a bottom portion 59 for mounting the assembly.

The bottom portion 59 is the reference plane for the fit system according to the invention. The accuracy is obtained by the relatively small tolerances on the height of the lamp holder 50 and the relatively small tolerances on the flange 55 on the one hand, and on the other hand is obtained by the small tolerances on the outer diameter of the cup-shaped portion 33 and the protruding collar 36 which both are used as the reference during the adjustment of the burner in the manufacturing process.

Figure 2 shows an exploded perspective view of an embodiment of the assembly of a capped high-pressure discharge lamp 1 and a lamp holder 50. For clarity reasons, Figure 2 shows the various elements of the assembly at a certain distance with respect to each other; in addition, the discharge vessel 11 has been omitted in Figure 2. In Figure 2, a lamp cap 30 is shown having a base portion 32 of an insulating material and a substantial circular-cylindrical cup-shaped portion 33 for receiving the clamping member 25. The base portion 32 is provided with a first 34 and a second 35 contact member projecting beyond the cup-shaped portion 33 (also see Figure 4). In the assembled state of the capped high-pressure discharge lamp 1 and the lamp holder 50, the first and second current-supply conductors 4, 5 are electrically connected to the first and second contact members 34, 35, respectively. The cup-shaped portion 33 is provided with a protruding collar 36 for engagement with the flange 55 of the lamp holder 50.

In Figure 2, the lamp holder 50 comprises a base portion 60 and a substantial circular-cylindrical flange 55 for receiving the cup-shaped portion 33 of the capped high-pressure discharge lamp 1. In addition, the base portion 60 is provided with first 74 and second 75 connection means.

In the assembled state of the capped high-pressure discharge lamp 1 and the lamp holder 50, the flange 55 of the lamp holder 50 receives the cup-shaped portion 33 of the capped high-pressure discharge lamp 1 such that the flange 55 engages the protruding collar 36 of the cup-shaped portion 33. In addition, the first and second contact members 34, 35

make electrical contact with the first and second connection means 74, 75, respectively, when the flange 55 receives the cup-shaped portion 33.

5 In order to position the discharge vessel 11 of the capped high-pressure discharge lamp 1 with relatively high accuracy in the lamp holder 50, an inner diameter of the flange 55 has a tolerance less than or equal to  $-0.2$  mm and an outer diameter of the cup-shaped portion 33 has a tolerance less than or equal to  $+0.2$  mm. These respective tolerances extend over a length of at least 2.5 mm measured from the protruding collar 36 along the longitudinal axis 22 in a direction facing away from the discharge vessel 11.

10 Upon receiving the cup-shaped portion 33 of the capped high-pressure discharge lamp 1, the flange 55 of the lamp holder 50 engages the protruding collar 36 of the cup-shaped portion 33. This engaging relationship between the cup-shaped portion 33 and the flange 55 determines the height of the discharge vessel 11 with respect to the lamp holder 50. In this manner the light-center length along the longitudinal axis 22 is accurately determined. The position of the center of the light discharge in a plane perpendicular to the longitudinal  
15 axis is determined by the tolerances of the respective diameters of the flange 55 of the lamp holder 50 and the cup-shaped portion 33 of the capped high-pressure discharge lamp 1. The higher the requirement for the tolerance of the respective diameters, the better the center of the light discharge is positioned on the longitudinal axis 22.

20 Preferably, the inner diameter of the flange 55 has a tolerance less than or equal to  $-0.10$  mm and the outer diameter of the cup-shaped portion 33 has a tolerance less than or equal to  $+0.05$  mm, the respective tolerances extending over a length of at least 5 mm measured with respect to the protruding collar 36 along the longitudinal axis 22. Specifying relatively narrow tolerances for the respective diameters of the flange 55 of the lamp holder 50 and the cup-shaped portion 33 enables the positioning of the cup-shaped portion 33 into  
25 flange 55 with relatively high accuracy. In this manner, the discharge vessel 11 of the capped high-pressure discharge lamp 1 can be positioned with relatively high accuracy in the lamp holder 50.

30 In order to improve the accuracy of the position of cup-shaped portion 33 of the capped high-pressure discharge lamp 1 in the flange 55 of the lamp holder 50, the mounting of the clamping member 25 in the lamp cap 30 can be improved. To this end, the clamping member 25 is provided with a substantially circular-cylindrical engagement portion 26 for fixing the clamping member 25 in the cup-shaped portion 33. The engagement portion 26 enhances the fit of the clamping member 25 in the cup-shaped portion 33. In addition, the

engagement portion 26 can be used to provide a rigid connection, for instance by spot welding, between the clamping member 25 and the cup-shaped portion 33.

In order to meet the requirements of the relative high accuracy of mounting the cup-shaped portion 33 of the lamp cap 30 in the lamp holder 50, the cup-shaped portion 33 and the flange 55 of the lamp holder 50 are, preferably, made from metal. A suitable metal is stainless steel.

In Figure 2, a cylindrical body 60 of an insulating material is arranged with clearance in the base portion 60 of the lamp holder 50 and a resilient means 65 is provided between the cylindrical body 60 and the flange 55 of the lamp holder 50. The cylindrical body 60 lies under resilient pressure against the flange 55 when the flange 55 receives the cup-shaped portion 33. To this end, the diameter of the flange 55 is chosen smaller than the diameter of the base portion 60. In addition, the cylindrical body 60 has a first cylindrical portion 61 and an adjacent second cylindrical portion 62 at a side of the first cylindrical portion 61 facing away from the capped high-pressure discharge lamp 1. The first and second contact members 34, 35 of the base portion 32 make electrical contact with the first and second connection means 74, 75.

Preferably, the cylindrical body 60 is provided with hampering means hampering the rotation around the longitudinal axis 22 of the first and second cylindrical portions 61, 62 with respect to each other. Preferably, the first and second cylindrical portions 61, 62 are attached to each other by retention springs 68, 69. In an alternative embodiment the first and second cylindrical portions 61, 62 are attached to each other by rivets. Preferably, the first and second cylindrical portions 61, 62 are attached to each other in such a way that there movement between the first and second cylindrical portions 61, 62 is not possible.

Preferably, the base portion 32 of the lamp cap 30 is provided with a protruding portion cooperating with a complementary intruding portion in the first cylindrical portion 61 of the cylindrical body.

Figure 3 schematically shows the first cylindrical portion 61 of the base portion 60 in cross-section perpendicular to the longitudinal axis 22. The first and second cylindrical portion 61, 62 are preferably made from a ceramic material. Suitable ceramic materials are aluminum oxide and aluminum oxide with suitable additives, such as Mg, Ca or rare-earth metals. Ceramic materials are very suitable because of their ability to withstand the relatively high temperatures of the discharge lamp. The first cylindrical portion 61 is provided with a first 64 and a second 65 arc-shaped slot, which slots 64, 65 at one end are

provided with a circular widening 66, 67 for passing through the first and second contact members 34, 35 of the capped high-pressure discharge lamp 2 when the flange 55 of the lamp holder 50 is inserted into the cup-shaped portion 33 of the capped high-pressure discharge lamp 1 (also see Figure 2). As a next step the capped high-pressure discharge lamp 1 is

5 rotated in the direction indicated by the arrows in Figure 3 until the first and second contact members 34, 35 of the capped high-pressure discharge lamp 2 make contact with the first and second connection means 74, 75 provided in the second cylindrical portion 62. The rotation of the first and second contact members 34, 35 in the arc-shaped slots 64, 64 provides the moving of the first cylindrical portion 61 of the cylindrical body 60 in the direction of the

10 discharge vessel 11. Due to this movement pressure is put on the resilient means 65 between the first cylindrical portion 61 and the flange 55 of the lamp holder 50. In this manner the height of the discharge vessel 11 with respect to the lamp holder 50 is only determined by the engaging relationship between the cup-shaped portion 33 and the flange 55 of the lamp holder 50. In this manner the light-center length along the longitudinal axis 22 is accurately

15 determined.

Figure 4 schematically shows a cross-section of lamp holder 50 and the lamp cap 30 comprising the substantial circular-cylindrical cup-shaped portion 33 provided with the protruding collar 36 and the base portion 32 provided with the first and second contact member 34, 35. The first and second contact members 34, 35 are provided with a shank 82, 83. Each shank 82, 83 is provided with a disc 84, 85 at a side of the shank 82, 83 facing away

20 from the cup-shaped portion 33. The discs 84, 85 have a dimension allowing passage through the circular widening 66, 67 of the slots 64, 65 in the first cylindrical portion 61 (for clarity reasons the first and second cylindrical portion 61, 62 are not shown in Figure 4). The shanks 82, 83 have a smaller dimension allowing passage through the first and second arc-shaped

25 slots 64, 65 in the first cylindrical portion 61 (see Figure 3).

Figure 4 also shows the clamping member 25 mounted in the base portion 32 of the lamp cap 30. The clamping member 25 is provided with a substantially circular-cylindrical engagement portion 26 for fixing the clamping member 25 in the cup-shaped portion 33.

30 Figure 4 also shows the lamp holder 50 with the flange 55. In the example of Figure 4 the flange 55 of the lamp holder 50 has received the cup-shaped portion 33 of the capped high-pressure discharge lamp 1. The flange 55 engages the protruding collar 36 of the cup-shaped portion 33. In a very favorable embodiment of the assembly the inner diameter of the flange 55 has a tolerance less than or equal to -0.05 mm and the outer diameter of the



cup-shaped portion 33 has a tolerance less than or equal to +0.1 mm, the respective tolerances extending over a length of approximately 10 mm measured with respect to the protruding collar 36 along the longitudinal axis 22. The lamp holder 50 is provided with a bottom portion 59 for mounting the assembly.

5 Preferably, the second cylindrical portion 61 is provided with an inclined surface for engagement with the first and second contact member 34, 35. During rotation of the first and second contact members 34, 35 in the arc-shaped slots 64, 64, the discs 84, 85 move along the inclined surface enabling the building up of sufficient strength for establishing the a firm grip of the cup-shaped portion 33 of the capped high-pressure  
10 discharge lamp 1 in the flange 55 of the lamp holder 50. The inclined surface cooperating with the first and second contact member 34, 35 establishes the reference engagement of the protruding collar 36 of the cup-shaped portion 33 and the flange 55 of the lamp holder 50.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative  
15 embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. Use of the verb "comprise" and its conjugations does not exclude the presence of elements or steps other than those stated in a claim. The article "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The invention may be implemented by  
20 means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In the device claim enumerating several means, several of these means may be embodied by one and the same item of hardware. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.



## CLAIMS:

1. An assembly of a capped high-pressure discharge lamp (1) and a lamp holder (50),  
the capped high-pressure discharge lamp (1) comprising:
- an outer envelope (10) in which a discharge vessel (11) is arranged around a longitudinal axis (22),
  - the discharge vessel (11) enclosing, in a gastight manner, a discharge space (13) provided with an ionizable filling,
  - the discharge vessel (11) having a first (2) and a second (3) mutually opposed connection portion through which a first (4) and a second (5) current-supply conductor, respectively, extend to a pair of electrodes (6, 7) arranged in the discharge space (13),
  - the outer envelope (10) having a pinched portion (20) supporting the discharge vessel (11) via the first and second current-supply conductors (4, 5),
  - the pinched portion (20) being provided with a clamping member (25) surrounding the pinched portion (20) with clamping fit,
  - a lamp cap (30) having a base portion (32) of an insulating material and a substantial circular-cylindrical cup-shaped portion (33) for receiving the clamping member (25),
  - the cup-shaped portion (33) being provided with a protruding collar (36),
  - the base portion (32) being provided with a first (34) and a second (35) contact member projecting beyond the cup-shaped portion (33), the first and second current-supply conductors (4, 5) being electrically connected to the first and second contact members (34, 35), respectively,
- the lamp holder (50) comprising:
- a base portion (60) and a substantial circular-cylindrical flange (55) for receiving the cup-shaped portion (33) of the capped high-pressure discharge lamp (1),
  - the base portion (60) being provided with first (74) and second (75) connection means,
- wherein

- the flange (55) of the lamp holder (50) receives the cup-shaped portion (33) of the capped high-pressure discharge lamp (1) such that the flange (55) engages the protruding collar (36) of the cup-shaped portion (33) and the first and second contact members (34, 35) make electrical contact with the first and second connection means (74, 75), respectively,
  - 5 - an inner diameter of the flange (55) having a tolerance less than or equal to -0.2 mm,
  - an outer diameter of the cup-shaped portion (33) having a tolerance less than or equal to +0.2 mm,
  - the respective tolerances extending over a length of at least 2.5 mm measured
  - 10 with respect to the protruding collar (36) along the longitudinal axis (22).
2. An assembly as claimed in claim 1, characterized in that the inner diameter of the flange (55) has a tolerance less than or equal to -0.10 mm and the outer diameter of the cup-shaped portion (33) has a tolerance less than or equal to +0.05 mm, the respective
- 15 tolerances extending over a length of at least 5 mm measured with respect to the protruding collar (36) along the longitudinal axis (22).
3. An assembly as claimed in claim 1 or 2, characterized in that the clamping member (25) is provided with a substantially circular-cylindrical engagement portion (26) for
- 20 fixing the clamping member (25) in the cup-shaped portion (33).
4. An assembly as claimed in claim 1 or 2, characterized in that the cup-shaped portion (33) of the lamp cap (30) and the flange (55) of the lamp holder (50) are made from a metal.
- 25
5. An assembly as claimed in claim 1 or 2, characterized in that a cylindrical body (60) of an insulating material is arranged with clearance in the base portion (60) of the lamp holder (50) and a resilient means (65) is provided between the cylindrical body (60) and the flange (55) of the lamp holder (50), the cylindrical body (60) lying under resilient
- 30 pressure against the flange (55) when the flange (55) receives the cup-shaped portion (33).
6. An assembly as claimed in claim 5, characterized in that

the cylindrical body (60) comprises a first cylindrical portion (61) and an adjacent second cylindrical portion (62) at a side of the first cylindrical portion (61) facing away from the capped high-pressure discharge lamp (1),

the first cylindrical portion (61) being provided with a first (64) and a second (65) arc-shaped slot, which slots (64, 65) at one end are provided with a circular widening (66, 67) for passing through the first and second contact members (34, 35) when the flange (55) of the lamp holder (50) receives the cup-shaped portion (33) of the capped high-pressure discharge lamp (1),

the first and second contact members (34, 35) of the base portion (32) making electrical contact with the first and second connection means (74, 75) after rotation of the first and second contact members (34, 35) in the arc-shaped slots (63),

the first and second connection means (74, 75) being provided in the second cylindrical portion (62).

7. An assembly as claimed in claim 6, characterized in that the first and second cylindrical portion (61, 62) are made from a ceramic material.

8. An assembly as claimed in claim 6, characterized in that the cylindrical body (60) is provided with hampering means hampering the rotation around the longitudinal axis (22) of the first and second cylindrical portions (61, 62) with respect to each other.

9. An assembly as claimed in claim 6, characterized in that the first and second cylindrical portions (61, 62) are attached to each other by retention springs (68, 69) or by rivets.

10. An assembly as claimed in claim 6, characterized in that the first and second contact members (34, 35) are provided with a shank (82, 83), the shank (82, 83) being provided with a disc (84, 85) at a side of the shank (82, 83) facing away from the cup-shaped portion (33), the disc (84, 85) having a dimension allowing passage through the circular widening (66, 67) of the slots (64, 65), the shanks (82, 83) having a smaller dimension allowing passage through the first and second arc-shaped slots (64, 65).

11. An assembly as claimed in claim 6, characterized in that the base portion (32) of the lamp cap (30) is provided with a protruding portion cooperating with a complementary intruding portion in the first cylindrical portion (61) of the cylindrical body.

5 12. A capped high-pressure discharge lamp (1) for use in an assembly as claimed in claim 1 or 2, the capped high-pressure discharge lamp (1) comprising:  
an outer envelope (10) in which a discharge vessel (11) is arranged around a longitudinal axis (22),  
the discharge vessel (11) enclosing, in a gastight manner, a discharge space  
10 (13) provided with an ionizable filling,  
the discharge vessel (11) having a first (2) and a second (3) mutually opposed connection portion through which a first (4) and a second (5) current-supply conductor, respectively, extend to a pair of electrodes (6, 7) arranged in the discharge space (13),  
the outer envelope (10) having a pinched portion (20) supporting the discharge  
15 vessel (11) via the first and second current-supply conductors (4, 5),  
the pinched portion (20) being provided with a clamping member (25) surrounding the pinched portion (20) with clamping fit,  
a lamp cap (30) having a base portion (32) of an insulating material and a substantial circular-cylindrical cup-shaped portion (33) for receiving the clamping member  
20 (25),  
the cup-shaped portion (33) being provided with a protruding collar (36),  
the base portion (32) being provided with a first (34) and a second (35) contact member projecting beyond the cup-shaped portion (33), the first and second current-supply conductors (4, 5) being electrically connected to the first and second contact members (34, 35), respectively,  
25 an outer diameter of the cup-shaped portion (33) having a tolerance less than or equal to +0.2 mm.

13. A lamp holder (50) for use in an assembly as claimed in claim 1 or 2, the lamp  
30 holder (50) comprising:  
a base portion (60) and a substantial circular-cylindrical flange (55) for receiving the cup-shaped portion (33) of the capped high-pressure discharge lamp (1),  
the base portion (60) being provided with first (74) and second (75) connection means,

an inner diameter of the flange (55) having a tolerance less than or equal to  
-0.2 mm.





## ABSTRACT:

The invention relates to an assembly of a capped high-pressure discharge lamp (1) and a lamp holder (50). The discharge lamp comprises an outer envelope (10) in which a discharge vessel (11) is arranged. The outer envelope has a pinched portion (20) provided with a clamping member (25). A lamp cap comprises a substantial circular-cylindrical cup-shaped portion for receiving the clamping member and provided with a protruding collar (36). The lamp holder (50) comprises a substantial circular-cylindrical flange (55) for receiving the cup-shaped portion such that the flange engages the protruding collar. An inner diameter of the flange (55) has a tolerance less than or equal to -0.2 mm. An outer diameter of the cup-shaped portion (33) has a tolerance less than or equal to +0.2 mm. The respective tolerances extend over a length of at least 2.5 mm measured with respect to the protruding collar.

Fig. 1




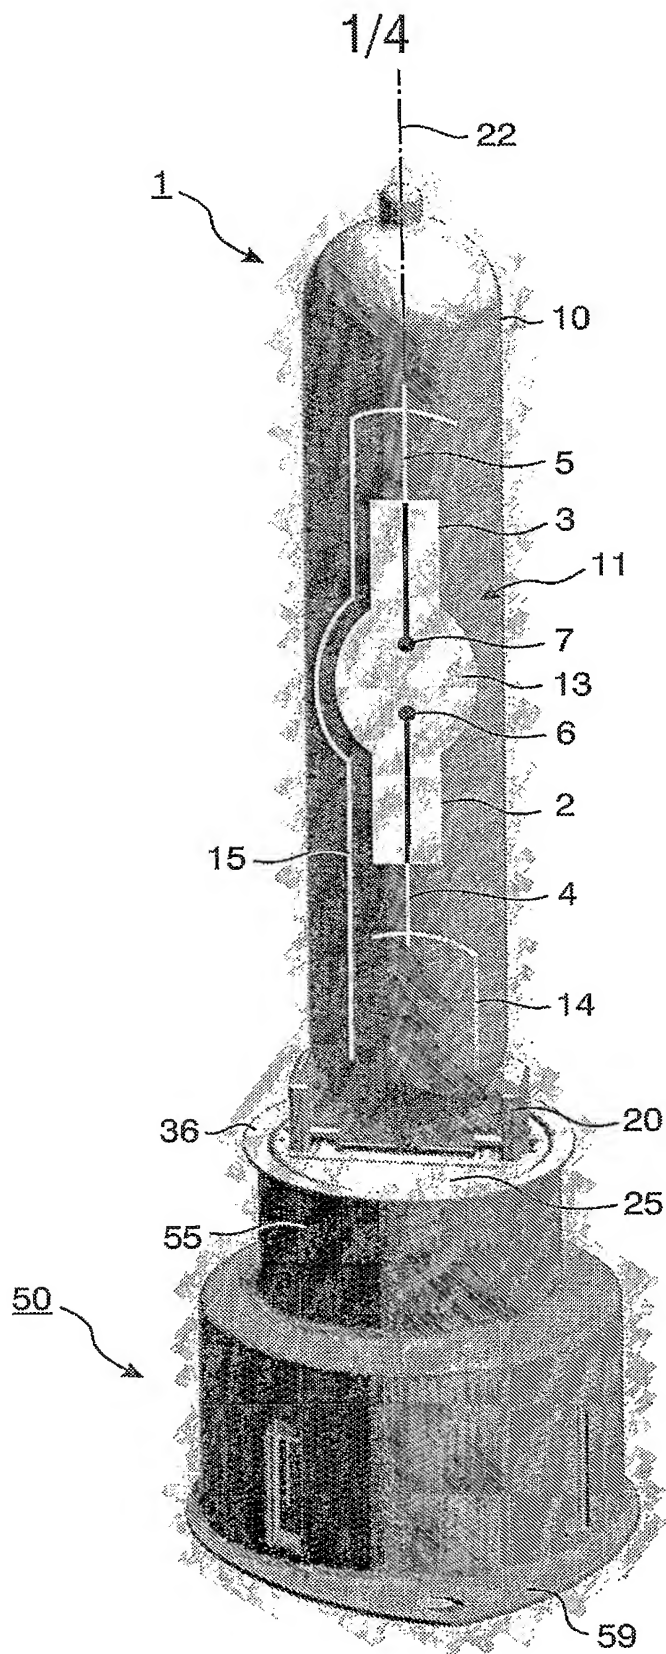


FIG.1

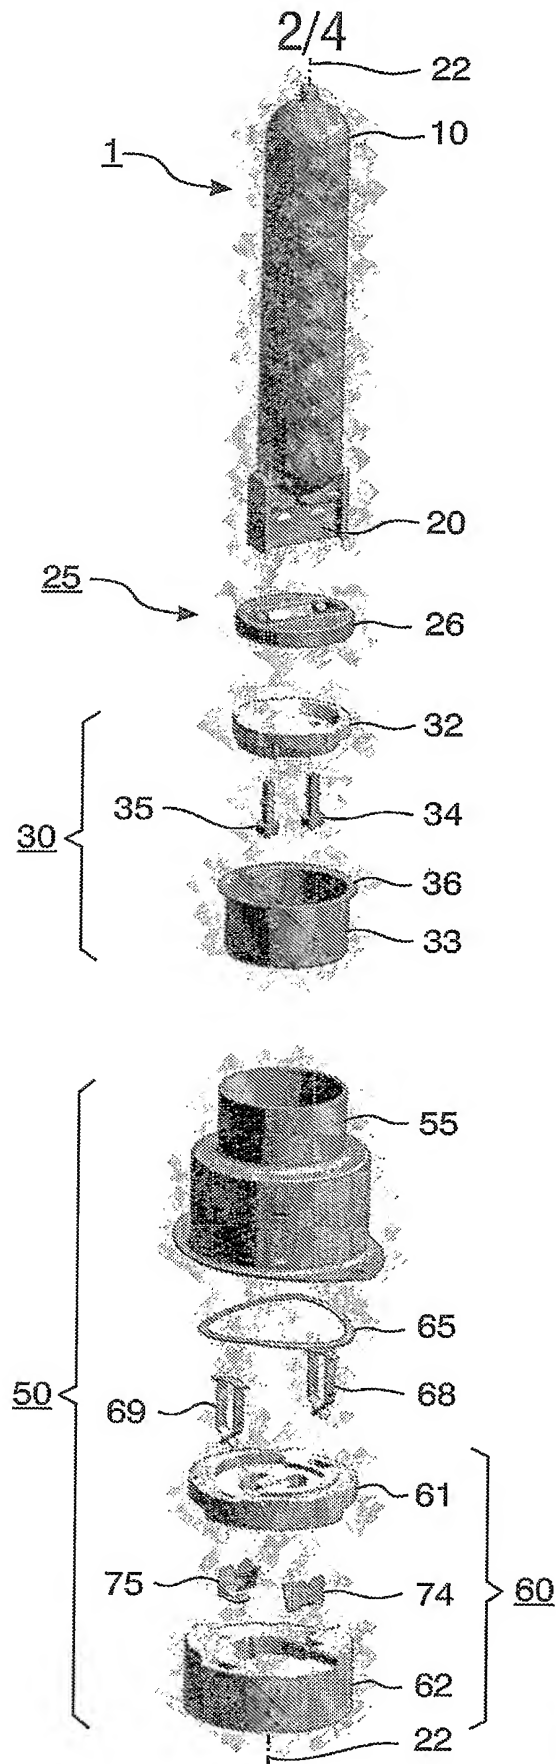

3/4

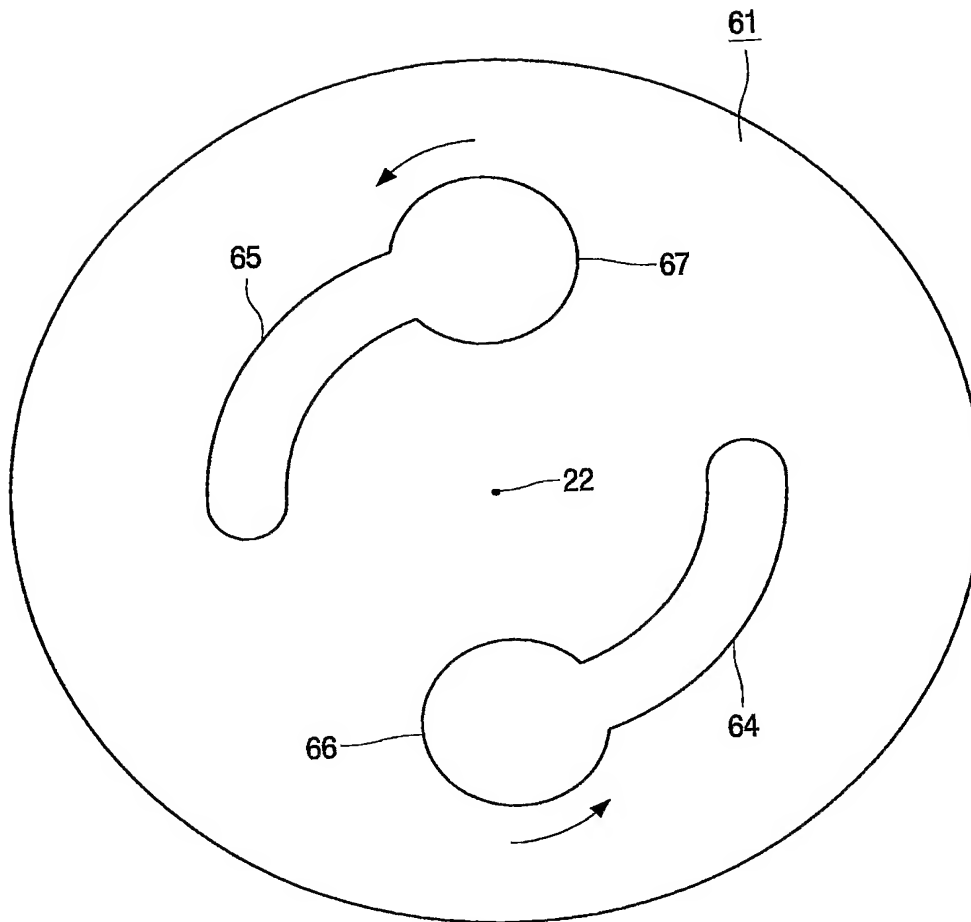


FIG. 3

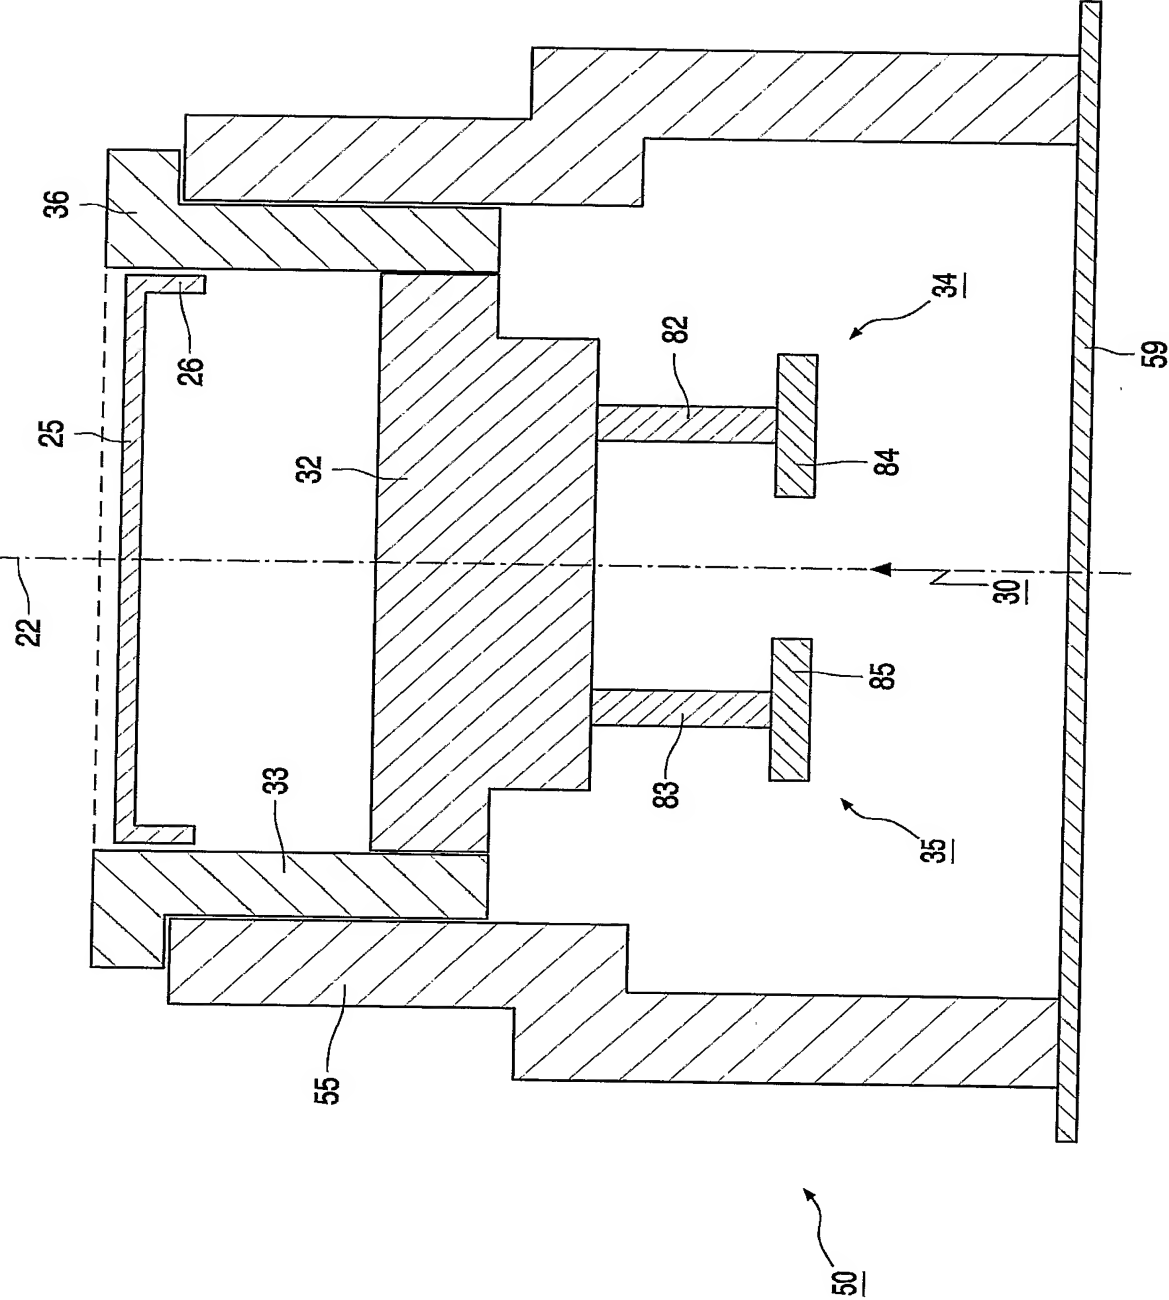


FIG. 4